




ECO BUILDING GROUP

NEW & FASTER BUILDING SYSTEM OUR NEWEST BLOCKS

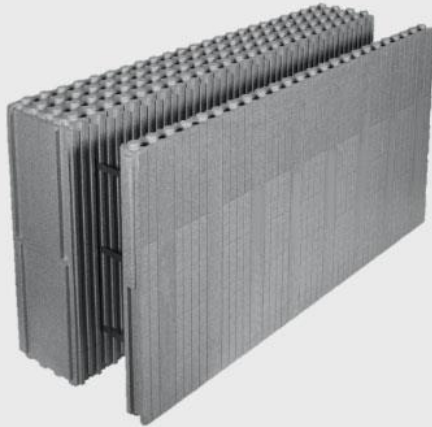


STANDARD BLOCK

Length	1200 mm
Height	600 mm
Thickness	400 mm
Exterior insulation	200 mm
Concrete wall	150 mm
Interior insulation	50 mm
R-Value	8,31 m ² K/W
U-Value	0,12 W/m ² K

EXTERNAL CORNER

Length long side	900 mm
Length short side	600 mm
Height	600 mm
Thickness	400 mm
External insulation	200 mm
Concrete wall	150 mm
Internal insulation	50 mm
R-Value	8,31 m ² K/W
U-Value	0,12 W/m ² K

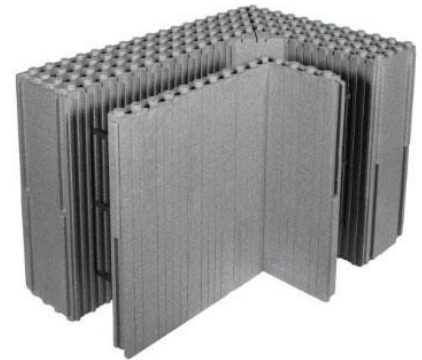

ECO BUILDING GROUP
Main office


: info@ecobuilding.group
: Avda Ricardo Soriano 12, Planta 2 Oficina 1, 29601 Marbella/Spain
+34 952 76 40 00 +34 604 41 54 58



ECOBUILDING
we make your world GREEN again

ECO BUILDING GROUP



INTERNAL CORNER

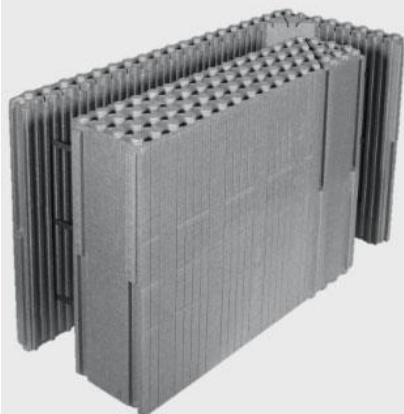

Length long side	1000 mm
Length short side	400 mm
Height	600 mm
Thickness	400 mm
External insulation	200 mm
Concrete wall	150 mm
Internal insulation	50 mm
R-Value	8,31 m ² K/W
U-Value	0,12 W/m ² K

END PIECE

Used to seal the openings at windows and doors closure.
No thermal bridges.

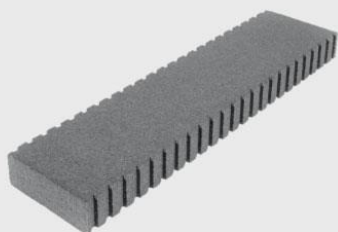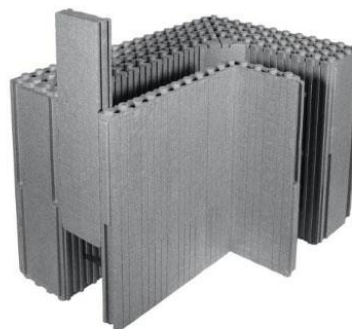

LINTEL

Used to avoid thermal bridges at windows and doors.
Lintels are easily placed.

ECO BUILDING GROUP
Main office

: info@ecobuilding.group
: Avda Ricardo Soriano 12, Planta 2 Oficina 1, 29601 Marbella/Spain
+34 952 76 40 00 +34 604 41 54 58